




# Alloy Machined Side-Eject Tine With Carbide Tip - .375MT x 4.500L x .545OD

R201668

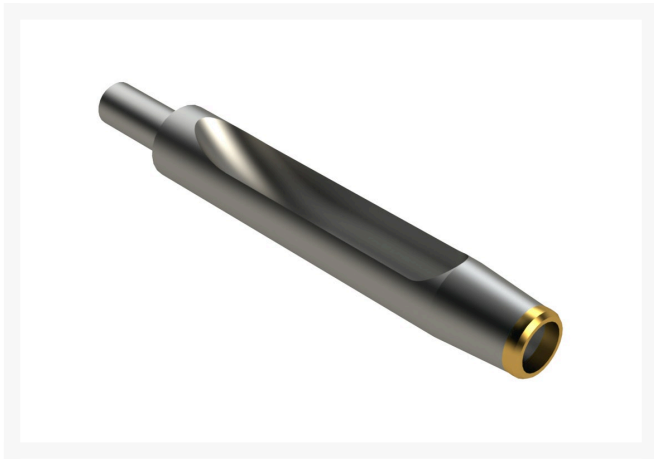

## Details

Manufactured from special high-carbon alloy tubular steel with a precision machined slot in the side wall to allow for more efficient core removal in heavy soils. R&R's unique method of machining maintains the maximum side wall height for strength to avoid bending. These tines are through hardened to RC45-48 to create a much tougher and more wear-resistant tine. A carbide tip is then added for even longer life. The advantage of using carbide-tipped tines is the ability to maintain your maximum aerating depth consistently over the life of the tines.

## Replaces

R&R Products	R108-9116
Toro	108-9116

## Specifications

Manufacturer	R&R Products
A - Tine Type	Alloy Machined Side-Eject with Carbide Tip
B - Tine Mounting Dia.	.375 in (9.5mm)
C - Tine Length	4.5 in (114mm)
Carbide Tip	Carbide Tip
D - Tine Tip Outside (Hole) Dia.	.545 in (13.8mm)
E - Tine Tip Inside (Core) Dia.	.400 in (10.2mm)
F - Tine Wall Thickness	.062 in (1.6mm)

## GERT KAUFMANN Golf Course Management

Graf-Buttler-Strasse 7 Haimhausen, 85778  
+498133907773

<https://golfkauf.rrproducts.com/>



# Alloy Machined Side-Eject Tine With Carbide Tip - .375MT x 4.500L x .545OD

R201668



## Fits Models

John Deere Aercore 1000  
John Deere Aercore 1500  
John Deere Aercore 2000  
John Deere Aercore 800  
Toro Greens Aerator  
Toro ProCore 1298  
Toro ProCore 440  
Toro ProCore 648  
Toro ProCore 660  
Toro ProCore 864  
Toro ProCore 880  
Toro ProCore 648s

**GERT KAUFMANN Golf Course Management**

Graf-Buttler-Strasse 7 Haimhausen, 85778  
+498133907773

<https://golfkauf.rrproducts.com/>